

Pulp Bale Clamps

Models BA-100P




The Auramo clamp BA-100P model is designed for effective and safe heavy-duty pulp bale handling.

Typical applications are in pulp mills, warehouses, terminals, stevedoring docks as well as in any other loading and unloading operations in the logistic chain.

Features:

- Steel profile frame with strong “T” profile arm carrier.
- Welded profile frame with heavy-duty bearings offering performance advantages and longer lifetime.
- Arms welded to the arm carriers. Colorless arm finish.
- Slim and strong arm design ensures easy knifing and tight stacking.
- Left-side arm pivots to compensate differences in bale unit sizes. Compact and strong pivot design offers exceptional strength and service life. Fixed left arm is available on request.
- Side shift valve with built-in pressure relief valve for both clamping and opening.
- Capacity 10.000 kg at 800 mm load center with a wide choice of arm configurations and mounting options enable efficient handling of 1 to 4 pulp bale units of all sizes.
- Clamping cylinders with flexible mountings for heavy duty handling.



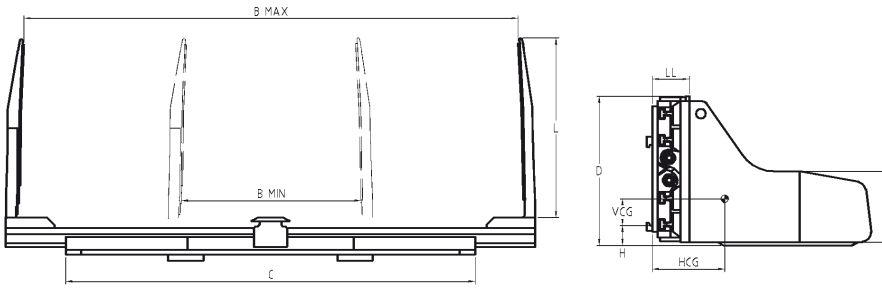

Range: 10000 Kg

- Heavy-duty pulp bale clamp for handling of 4 units.
- Steel profile frame with strong "T" profile arm carrier.
- Colorless arms welded directly to the arm carriers. Left arm pivoted.
- Slim and strong arm design ensures easy knifing and tight stacking.
- Built-in integral sideshift improves positioning.

Model	Code	Capacity	Load Centre	Opening Range	Arm Length	Arm Height	Frame Width	Minimum Carriage Width	Height	Weight	Horizontal Centre of Gravity	Effective Thickness	Mounting Height	Mounting Class
BA-100P 14	73-326	10.000	800	730-3.260	1.400	550	2.420	①	1.125	3.300	330	320	①	①
BA-100P 16	73-326	10.000	800	730-3.260	1.600	550	2.420	①	1.125	3.450	370	320	①	①
BA-100P 14	73-346	10.000	800	730-3.460	1.400	550	2.620	①	1.125	3.500	320	320	①	①
BA-100P 16	73-346	10.000	800	730-3.460	1.600	550	2.620	①	1.125	3.650	360	320	①	①
BA-100P 16	73-366	10.000	800	730-3.660	1.400	550	2.820	①	1.125	3.600	310	320	①	①
BA-100P 14	73-366	10.000	800	730-3.660	1.600	550	2.820	①	1.125	3.750	350	320	①	①
BA-100P 16	73-386	10.000	800	730-3.860	1.400	550	3.020	①	1.125	3.700	310	320	①	①
BA-100P 14	73-386	10.000	800	730-3.860	1.600	550	3.020	①	1.125	3.850	340	320	①	①
BA-100P 14	73-406	10.000	800	730-4.060	1.400	550	3.220	①	1.125	3.800	300	320	①	①
BA-100P 16	73-406	10.000	800	730-4.060	1.600	550	3.220	①	1.125	3.950	340	320	①	①

Notes:

- Two hydraulic functions required.
- ① Consult Bolzoni Group regarding factory specifications for special mounting.

Options:

- Special opening ranges.
- Special arm length and arm finish.
- Center arm.
- Non-pivoted left arm.
- Load backrest
- Horizontal full-width load bumper.
- Central vertical load bumper plate.

