
Paper Roll Clamps

Models BA-RJ

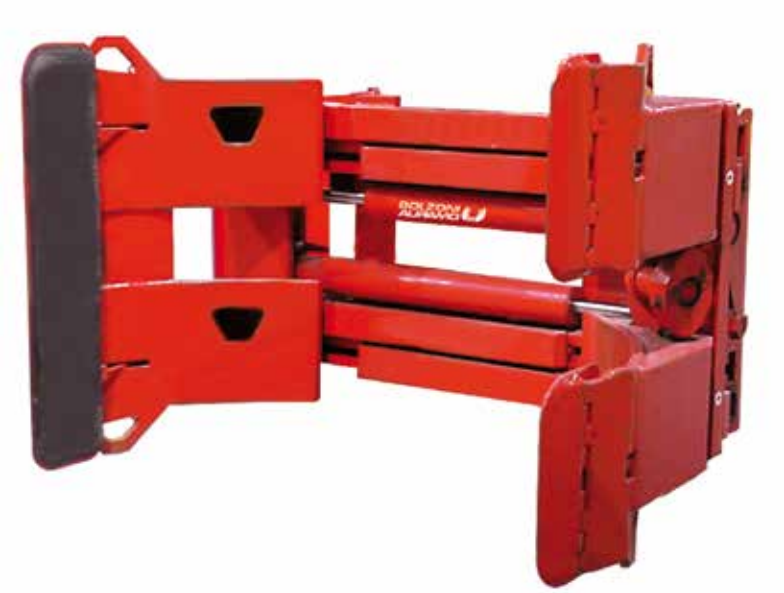

The Auramo BA-RJ model non-rotating sliding-arm clamps are designed for handling 1 to 4 paper rolls. Twinpack handling capability with two rolls side by side and two on top, as well as single roll handling, makes the clamp highly versatile.

Typical application fields are in paper mills, warehouses and harbors, where high handling efficiency is required.

Like all Auramo paper handling attachments, the Series BA-RJ clamps offer uncompromising handling properties. The thin and smooth arm and contact pad design enables easy and tight stacking, and helps to utilize the storage space more efficiently.

The split left arm adjusts automatically to varying paper roll diameters allowing safe and damage-free handling of two rolls on top of each other.

Good visibility through the clamp frame increases operation safety.

Internal sideshift is a standard feature of BA-RJ clamps. With the sideshift, loading and unloading can be done more precisely and with less lift truck manoeuvring.

The strong steel frame and T-profile arm carriers give long service life. Durable, low-friction bearings require a minimal amount of lubrication.

The valve block is well protected behind the clamp body and cartridge-type valves are used for easier service.

Auramo BA-RJ series clamps can be mounted on all standard lift trucks. Several mounting options are available.

Bolzoni Group offers a wide variety of options for clamp pad friction surfaces. Please contact your Bolzoni Group dealer for more information.

We recommend the use of 4-stage pressure relief valves when handling sensitive paper qualities with varying roll sizes and widths.











AURAMO

Non-Rotating Lateral Paper Roll Clamps

Models BA-RJ

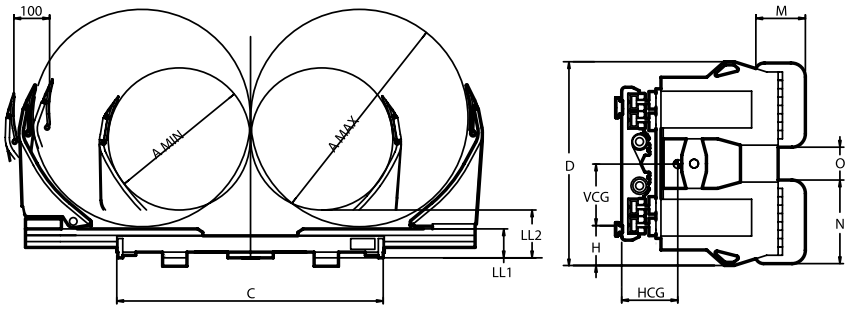

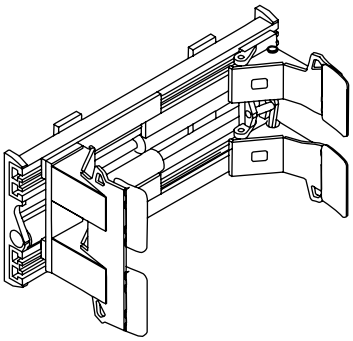

Range: 11,000 Lbs.

- Designed for handling 1-4 rolls at a time.
- Equal long arms. Parallel arm movement.
- Split left arm compensates for roll diameter differences.
- Steel profile frame, strong T-profile arm carriers.
- Non-rotating.
- Built-in sideshift improves handling.

Model	Capacity Lbs.	Load Center	Roll Range	Frame Width	Height	Weight Lbs.	Horizontal Center of Gravity	Vertical Center of Gravity	Effective Thickness	Contact Pads	Contact Pad Gap	Mounting Height	Mounting Class
	Q	*BP*	*A*	*C*	*D*	*W*	*HCG*	*VCG*	*LL1 / LL2*	*M x N*	*O*	*H*	
BA-50-RJ	11,000	26”	2x [34”-51”]	63”	48.8”	3,640	10.4”	13.9”	7.9”/15.0”	11.0”x19.7”	7.9”	9.1”	IV

Notes:

- Two hydraulic functions required.
- Consult Bolzoni Group for hydraulic pressure and flow rate recommendations.
- Standard contact pads: cast pad with high-friction surface.

Options:

- Special roll ranges.
- External sideshift.
- Independent arm movement.
- Fixed centre arm and two moveable split arms.
- Full-length contact pads.
- Contact pad options:
  - steel-sprayed
  - polyutethane-faced
  - rubber faced.

CERTIFIED ISO 9001 MANUFACTURER

79BA0021US - 0625

BOLZONI Inc.
17635 HOFFMAN WAY - HOMEWOOD, ILLINOIS 60430 (U.S.A.)
TEL. +1-800 358 54 38 (U.S.A. only) - TEL. +1-708 957 88 09

7711 HIGHWAY 278, SULLIGENT, ALABAMA 35586 (U.S.A.)
TEL. +1-205 698 1231

www.bolzonigroup.com - insidesales.us@bolzonigroup.com

BOLZONI GROUP