

Waste Paper Bale Clamps

Models BA-W



The Auramo series BA-W waste paper bale clamps are designed for heavy-duty waste paper bale handling.

BA series are designed for use on both forklifts and wheel loaders. Extremely thin and light design for high residual capacity and with optimal visibility.



High lifting capacity and wide choice of different openings and arm lengths enable efficient handling of all sizes of waste paper bale units.

Thin arm design makes tight bale stacking and knifing between bales easy. Fixed bale arms secure handling even with varying bale dimensions. Wear strips placed in the lower part of the frame and the arms.

The clamp frame is made of welded steel profiles. The special steel T-profile arm carriers make the clamp extremely strong and rigid. Arm carrier bearings are easily replaceable and require a minimum amount of lubrication.

A variety of arm, rib and mounting options, as well as hydraulic options are available on request.



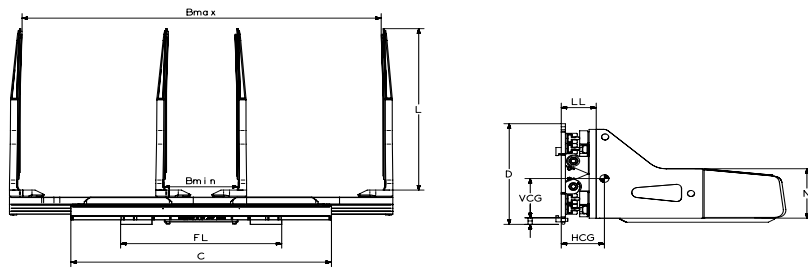

Range: 5000 Kg - 7000 Kg

- Bale clamp for heavy duty waste paper bale and other recycling applications
- Arms welded directly to the arm carriers, special welded arm corner
- Heavy duty arm and body design with optimal visibility.
- Steel profile frame, strong T-profile arm carriers.
- Slim arm design.
- Built-in integral sideshift.

Model	Code	Capacity	Load Centre	Opening Range	Arm Length	Arm Height	Frame Width	Minimum Carriage Width	Height	Weight	Horizontal Centre of Gravity	Vertical Centre of Gravity	Effective Thickness	Mounting Height	Mounting Class
		Q kg	BP mm	B mm	L mm	N mm	C mm	FL mm	D mm	W Kg	HCG mm	VCG mm	LL mm	H mm	ISO 2328
BA-50W 12C	74-262	5.000	900	740-2620	1.200	490	1.600	1.400	863	1.580	295	385	270	65	4 A
BA-50W 14C	74-260	5.000	900	740-2600	1.400	490	1.600	1.400	863	1.630	330	379	270	65	4 A
BA-50W 16C	74-258	5.000	900	740-2580	1.600	490	1.600	1.400	863	1.680	367	374	270	65	4 A
BA-50W 18C	74-256	5.000	900	740-2560	1.800	490	1.600	1.400	863	1.740	407	369	270	65	4 A
BA-50W 12C	74-282	5.000	900	740-2820	1.200	490	1.800	1.400	863	1.690	283	386	270	65	4 A
BA-50W 14C	74-280	5.000	900	740-2800	1.400	490	1.800	1.400	863	1.740	316	380	270	65	4 A
BA-50W 16C	74-278	5.000	900	740-2780	1.600	490	1.800	1.400	863	1.790	351	376	270	65	4 A
BA-50W 18C	74-276	5.000	900	740-2760	1.800	490	1.800	1.400	863	1.840	390	371	270	65	4 A
BA-65W 12C	72-320	6.500	900	720-3200	1.200	490	2.200	1.400	998	2.170	277	394	305	65	4 A
BA-65W 14C	72-319	6.500	900	720-3190	1.400	490	2.200	1.400	998	2.230	306	389	305	65	4 A
BA-65W 16C	72-318	6.500	900	720-3180	1.600	490	2.200	1.400	998	2.290	337	385	305	65	4 A
BA-65W 18C	72-316	6.500	900	720-3160	1.800	490	2.200	1.400	998	2.350	370	380	305	65	4 A
BA-65W 12C	72-340	6.500	900	720-3400	1.200	490	2.400	1.900	998	2.250	264	395	305	65	4 A
BA-65W 14C	72-339	6.500	900	720-3390	1.400	490	2.400	1.900	998	2.300	292	390	305	65	4 A
BA-65W 16C	72-337	6.500	900	720-3370	1.600	490	2.400	1.900	998	2.360	323	386	305	65	4 A
BA-65W 18C	72-336	6.500	900	720-3360	1.800	490	2.400	1.900	998	2.420	355	382	305	65	4 A
BA-70W 12C	72-320	7.000	900	720-3200	1.200	490	2.200	1.400	998	2.300	270	403	305	65	4 A
BA-70W 14C	72-319	7.000	900	720-3190	1.400	490	2.200	1.400	998	2.360	298	398	305	65	4 A
BA-70W 16C	72-318	7.000	900	720-3180	1.600	490	2.200	1.400	998	2.420	327	394	305	65	4 A
BA-70W 18C	72-316	7.000	900	720-3160	1.800	490	2.200	1.400	998	2.480	359	389	305	65	4 A
BA-70W 12C	72-340	7.000	900	720-3400	1.200	490	2.400	1.900	998	2.380	258	403	305	65	4 A
BA-70W 14C	72-339	7.000	900	720-3390	1.400	490	2.400	1.900	998	2.430	285	399	305	65	4 A
BA-70W 16C	72-337	7.000	900	720-3370	1.600	490	2.400	1.900	998	2.490	314	395	305	65	4 A
BA-70W 18C	72-336	7.000	900	720-3360	1.800	490	2.400	1.900	998	2.550	345	391	305	65	4 A

Notes:

- Two hydraulic functions required.
- Pressure relief valve on clamping, opening and sideshift
- Built-in integral sideshift.

Options:

- Special openings.
- Special arm lengths
- Full material arm tip
- Arms welded to the arm carriers
- Colourless arm finish.
- Load backrest.
- Cylinder protection.

