
Waste Paper Bale Clamps

Models BA-W

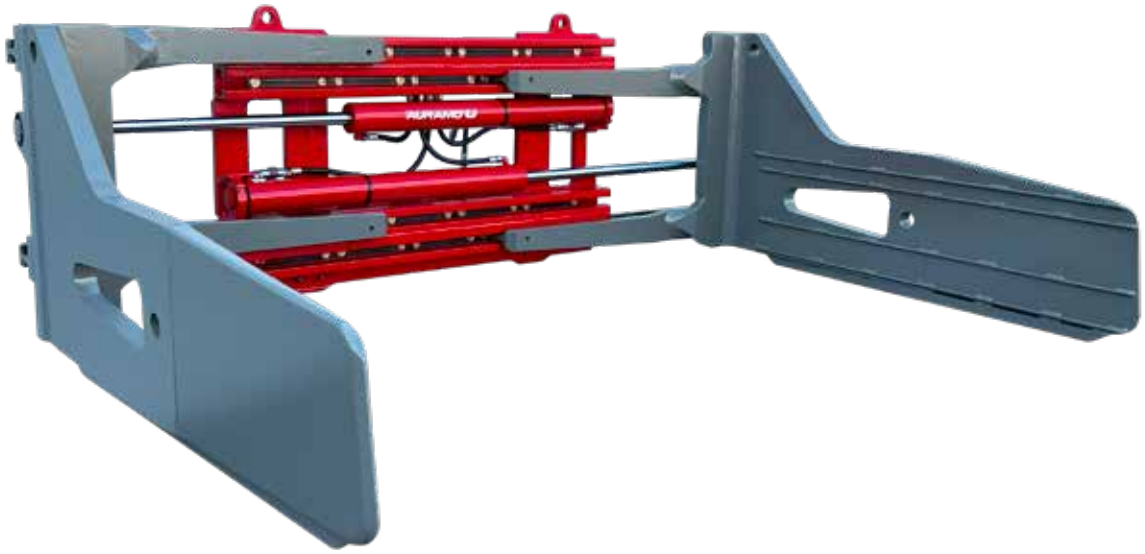

The Auramo series BA-W waste paper bale clamps are designed for heavy-duty waste paper bale handling.


BA series are designed for use on both forklifts and wheel loaders. Extremely thin and light design for high residual capacity and with optimal visibility.

High lifting capacity and wide choice of different openings and arm lengths enable efficient handling of all sizes of waste paper bale units.

Thin arm design makes tight bale stacking and knifing between bales easy. Fixed bale arms secure handling even with varying bale dimensions. Wear strips placed in the lower part of the frame and the arms.

The clamp frame is made of welded steel profiles. The special steel T-profile arm carriers make the clamp extremely strong and rigid. Arm carrier bearings are easily replaceable and require a minimum amount of lubrication.

A variety of arm, rib and mounting options, as well as hydraulic options are available on request.

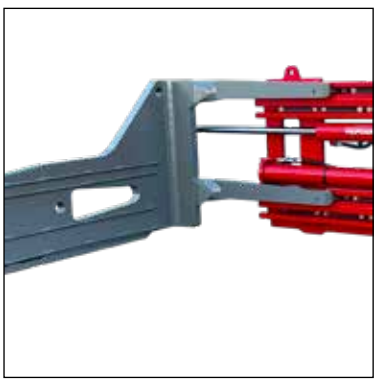









AURAMO

Waste Paper Bale Clamps

Models BA-W

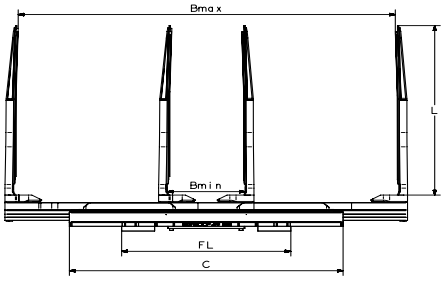



Range: 11,000 - 15,400 Lbs.

Features:

- Bale and other recycling applications
- Arms welded directly to the arm carriers, special welded arm corner
- Heavy duty arm and body design with optimal visibility.
- Steel profile frame, strong T-profile arm carriers.
- Slim arm design.
- Built-in integral sideshift.

Model	Code	Capacity Lbs.	Load Center	Opening Range	Arm Length	Arm Height	Frame Width	Minimum Carriage Width	Height	Weight Lbs.	Horizontal Center of Gravity	Vertical Center of Gravity	Effective Thickness	Mounting Height	Mounting Class
		Q	BP	B min- B max	L	N	C	*FL*	D	W	HCG	VCG	LL	H	
BA-120W 14D	64-240	11,000	35.4''	25.2''-94.5''	55.1''	19.3''	63.0''	55.1''	34.0''	3,530	12.2''	15.2''	10.2''	3.1''	IV
BA-120W 16D	64-238	11,000	35.4''	25.2''-93.7''	63.0''	19.3''	63.0''	55.1''	34.0''	3,840	14.3''	14.7''	10.6''	3.1''	IV
BA-120W 18D	64-236	11,000	35.4''	25.2''-92.9''	70.9''	19.3''	63.0''	55.1''	34.0''	3,950	15.8''	14.4''	10.6''	3.1''	IV
BA-120W 14D	74-260	11,000	35.4''	29.1''-102.4''	55.1''	19.3''	63.0''	55.1''	34.0''	3,550	12.2''	15.2''	10.2''	3.1''	IV
BA-120W 16D	74-258	11,000	35.4''	29.1''-101.6''	63.0''	19.3''	63.0''	55.1''	34.0''	3,840	14.3''	14.7''	10.6''	3.1''	IV
BA-120W 18D	74-256	11,000	35.4''	29.1''-100.8''	70.9''	19.3''	63.0''	55.1''	34.0''	3,970	15.8''	14.5''	10.6''	3.1''	IV
BA-120W 14D	64-260	11,000	35.4''	25.2''-102.4''	55.1''	19.3''	70.9''	55.1''	34.0''	3,770	11.8''	15.2''	10.2''	3.1''	IV
BA-120W 16D	64-258	11,000	35.4''	25.2''-101.6''	63.0''	19.3''	70.9''	55.1''	34.0''	4,100	13.7''	14.8''	10.6''	3.1''	IV
BA-120W 18D	64-256	11,000	35.4''	25.2''-100.8''	70.9''	19.3''	70.9''	55.1''	34.0''	4,210	15.1''	14.6''	10.6''	3.1''	IV
BA-120W 14D	74-280	11,000	35.4''	29.1''-110.2''	55.1''	19.3''	70.9''	55.1''	34.0''	3,790	11.7''	15.2''	10.2''	3.1''	IV
BA-120W 16D	74-278	11,000	35.4''	29.1''-109.4''	63.0''	19.3''	70.9''	55.1''	34.0''	4,100	13.7''	14.8''	10.6''	3.1''	IV
BA-120W 18D	74-276	11,000	35.4''	29.1''-108.7''	70.9''	19.3''	70.9''	55.1''	34.0''	4,210	15.1''	14.6''	10.6''	3.1''	IV
BA-140W 14D	62-299	14,300	35.4''	24.4''-117.7''	55.1''	19.3''	86.6''	55.1''	39.3''	4,410	12.0''	14.6''	11.2''	3.1''	IV
BA-140W 16D	62-298	14,300	35.4''	24.4''-117.3''	63.0''	19.3''	86.6''	55.1''	39.3''	4,520	13.2''	14.4''	11.2''	3.1''	IV
BA-140W 18D	62-296	14,300	35.4''	24.4''-116.5''	70.9''	19.3''	86.6''	55.1''	39.3''	5,230	14.6''	15.2''	12.0''	3.1''	IV
BA-140W 14D	72-319	14,300	35.4''	28.3''-125.6''	55.1''	19.3''	86.6''	55.1''	39.3''	4,410	12.0''	14.6''	11.2''	3.1''	IV
BA-140W 16D	72-318	14,300	35.4''	28.3''-125.2''	63.0''	19.3''	86.6''	55.1''	39.3''	4,520	13.2''	14.4''	11.2''	3.1''	IV
BA-140W 18D	72-316	14,300	35.4''	28.3''-124.4''	70.9''	19.3''	86.6''	55.1''	39.3''	5,250	14.6''	15.2''	12.0''	3.1''	IV
BA-140W 14D	62-319	14,300	35.4''	24.4''-125.6''	55.1''	19.3''	94.5''	74.8''	39.3''	4,520	11.9''	14.5''	11.2''	3.1''	IV
BA-140W 16D	62-317	14,300	35.4''	24.4''-124.8''	63.0''	19.3''	94.5''	74.8''	39.3''	4,630	13.1''	14.3''	11.2''	3.1''	IV
BA-140W 18D	62-316	14,300	35.4''	24.4''-148.0''	70.9''	19.3''	94.5''	74.8''	39.3''	5,400	14.1''	15.2''	12.0''	3.1''	IV
BA-140W 14D	72-339	14,300	35.4''	28.3''-133.5''	55.1''	19.3''	94.5''	74.8''	39.3''	4,520	11.8''	14.5''	11.2''	3.1''	IV
BA-140W 16D	72-337	14,300	35.4''	28.3''-132.7''	63.0''	19.3''	94.5''	74.8''	39.3''	4,630	13.0''	14.3''	11.2''	3.1''	IV
BA-140W 18D	72-336	14,300	35.4''	28.3''-132.3''	70.9''	19.3''	94.5''	74.8''	39.3''	5,400	14.1''	15.2''	12.0''	3.1''	IV
BA-150W 14D	62-299	15,400	35.4''	24.4''-117.7''	55.1''	19.3''	86.6''	55.1''	39.3''	5,200	11.7''	15.7''	12.0''	2.6''	IV
BA-150W 16D	62-298	15,400	35.4''	24.4''-117.3''	63.0''	19.3''	86.6''	55.1''	39.3''	5,330	12.9''	15.5''	12.0''	2.6''	IV
BA-150W 18D	62-296	15,400	35.4''	24.4''-116.5''	70.9''	19.3''	86.6''	55.1''	39.3''	5,450	14.1''	15.3''	12.0''	2.6''	IV
BA-150W 14D	72-319	15,400	35.4''	28.3''-125.6''	55.1''	19.3''	86.6''	55.1''	39.3''	5,200	11.7''	15.7''	12.0''	2.6''	IV
BA-150W 16D	72-318	15,400	35.4''	28.3''-125.2''	63.0''	19.3''	86.6''	55.1''	39.3''	5,330	12.9''	15.5''	12.0''	2.6''	IV
BA-150W 18D	72-316	15,400	35.4''	28.3''-124.4''	70.9''	19.3''	86.6''	55.1''	39.3''	5,470	14.1''	15.3''	12.0''	2.6''	IV
BA-150W 14D	62-319	15,400	35.4''	24.4''-125.6''	55.1''	19.3''	94.5''	74.8''	39.3''	5,360	11.2''	15.7''	12.0''	2.6''	IV
BA-150W 16D	62-317	15,400	35.4''	24.4''-124.8''	63.0''	19.3''	94.5''	74.8''	39.3''	5,490	12.4''	15.5''	12.0''	2.6''	IV
BA-150W 18D	62-316	15,400	35.4''	24.4''-124.4''	70.9''	19.3''	94.5''	74.8''	39.3''	5,620	13.6''	15.3''	12.0''	2.6''	IV
BA-150W 14D	72-339	15,400	35.4''	28.3''-133.5''	55.1''	19.3''	94.5''	74.8''	39.3''	5,360	11.2''	15.7''	12.0''	2.6''	IV
BA-150W 16D	72-337	15,400	35.4''	28.3''-132.7''	63.0''	19.3''	94.5''	74.8''	39.3''	5,490	12.4''	15.5''	12.0''	2.6''	IV
BA-150W 18D	72-336	15,400	35.4''	28.3''-132.3''	70.9''	19.3''	94.5''	74.8''	39.3''	5,620	13.6''	15.4''	12.0''	2.6''	IV

Notes:

- Two hydraulic functions required.
- Pressure relief valve on clamping, opening and sideshift
- Built-in integral sideshift.

Options:

- Special openings.
- Special arm lengths
- Full material arm tip
- Colourless arm finish.
- Load backrest.
- Cylinder protection.
- Quick change lower hooks.

CERTIFIED ISO 9001 MANUFACTURER

BOLZONI Inc.
17635 HOFFMAN WAY - HOMEWOOD, ILLINOIS 60430 (U.S.A.)
TEL. +1-800 358 54 38 (U.S.A. only) - TEL. +1-708 957 88 09

7711 HIGHWAY 278, SULLIGENT, ALABAMA 35586 (U.S.A.)
TEL. +1-205 698 1231

www.bolzonigroup.com - insidesales.us@bolzonigroup.com

BOLZONI GROUP

79BA0025US - 0625