

Pulp Bale Clamps

Models BC-P



The Auramo series BC-P pulp bale clamps are designed for heavy-duty pulp bale and waste paper bale handling.

BC series are designed for use on both forklifts and wheel loaders. Extremely thin and light design for high residual capacity and with optimal visibility.

High lifting capacity and wide choice of different openings and arm lengths enable efficient handling of one to three pulp-bale units.



Thin arm design makes tight bale stacking and knifing between bales easy. Pivoting left arm secures handling even with varying bale dimensions.

The clamp frame is made of welded steel profiles. The special steel T-profile arm carriers make the clamp extremely strong and rigid. Arm carrier bearings are easily replaceable and require a minimum amount of lubrication.

A variety of arm, rib and mounting options, as well as hydraulic options are available on request.

For dedicated handling of waste paper bales only we recommend our BA-W series.



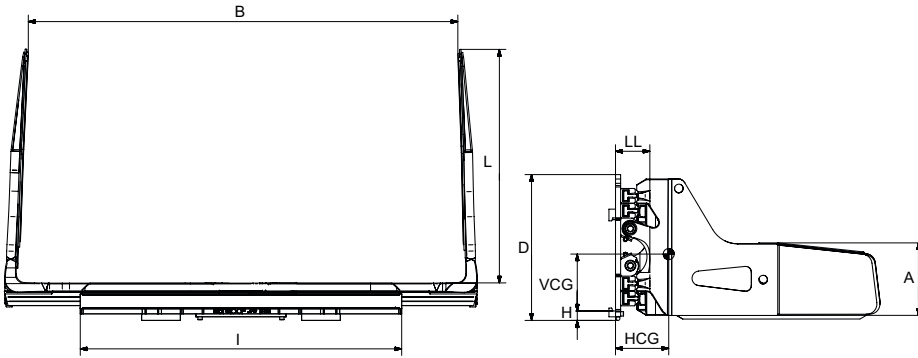

Range: 5000 Kg - 6500 Kg

Plus:

- Slim and thin bale clamp for standard pulp bale applications
- Optimized for two-side trailer loading and unloading, and for general pulp handling applications.
- Extremely thin and light design with optimal visibility.
- Special casted arm corner piece reduces weight, thickness and provides optimal handling properties in also confined spaces.
- Steel profile frame, strong T-profile arm carriers.
- Left arm pivoted.
- Built-in integral sideshift.

Model	Code	Capacity	Load Centre	Opening Range	Arm Length	Arm Height	Frame Width	Minimum Carriage Width	Height	Weight	Horizontal Centre of Gravity	Vertical Centre of Gravity	Effective Thickness	Mounting Height	Mounting Class
		Q kg	BP mm	B mm	L mm	N mm	C mm	FL mm	D mm	W Kg	HCG mm	VCG mm	LL mm	H mm	ISO 2328
BC-50P 14D	62-237	5.000	800	620-2.370	1.400	490	1.600	1.400	874	1.410	347	290	190	80	4 A
BC-50P 16D	62-234	5.000	800	620-2.340	1.600	490	1.600	1.400	874	1.460	387	285	190	80	4 A
BC-50P 14D	72-257	5.000	800	720-2.570	1.400	490	1.600	1.400	874	1.420	346	290	190	80	4 A
BC-50P 16D	72-254	5.000	800	720-2.540	1.600	490	1.600	1.400	874	1.460	387	286	190	80	4 A
BC-50P 14D	62-257	5.000	800	620-2.570	1.400	490	1.800	1.400	874	1.490	331	294	190	80	4 A
BC-50P 16D	62-254	5.000	800	620-2.540	1.600	490	1.800	1.400	874	1.550	372	289	190	80	4 A
BC-50P 14D	72-277	5.000	800	720-2.770	1.400	490	1.800	1.400	874	1.500	331	295	190	80	4 A
BC-50P 16D	72-274	5.000	800	720-2.740	1.600	490	1.800	1.400	874	1.550	371	289	190	80	4 A
BC-55P 16DL	60-233	5.000	900	600-2.330	1.600	490	1.600	1.400	974	1.630	394	382	210	80	4 A
BC-55P 18DL	60-231	5.000	900	600-2.310	1.800	490	1.600	1.400	974	1.690	435	377	210	80	4 A
BC-55P 16DL	70-253	5.000	900	700-2.530	1.600	490	1.600	1.400	974	1.640	393	382	210	80	4 A
BC-55P 18DL	70-251	5.000	900	700-2.510	1.800	490	1.600	1.400	974	1.690	434	377	210	80	4 A
BC-55P 16DL	60-253	5.000	900	600-2.530	1.600	490	1.800	1.400	974	1.740	376	384	210	80	4 A
BC-55P 18DL	60-251	5.000	900	600-2.510	1.800	490	1.800	1.400	974	1.800	416	379	210	80	4 A
BC-55P 16DL	70-273	5.000	900	700-2.730	1.600	490	1.800	1.400	974	1.750	376	384	210	80	4 A
BC-55P 18DL	70-271	5.000	900	700-2.710	1.800	490	1.800	1.400	974	1.810	415	379	210	80	4 A
BC-65P 14D	60-295	6.500	800	600-2.950	1.400	490	2.200	1.400	974	1.880	319	372	210	80	4 A
BC-65P 16D	60-292	6.500	800	600-2.920	1.600	490	2.200	1.400	974	1.940	355	366	210	80	4 A
BC-65P 14D	70-315	6.500	800	700-3.150	1.400	490	2.200	1.400	974	1.890	319	372	210	80	4 A
BC-65P 16D	70-312	6.500	800	700-3.120	1.600	490	2.200	1.400	974	1.950	354	366	210	80	4 A
BC-65P 14D	60-315	6.500	800	600-3.150	1.400	490	2.400	1.900	974	1.940	314	368	210	80	4 A
BC-65P 16D	60-312	6.500	800	600-3.120	1.600	490	2.400	1.900	974	2.000	348	363	210	80	4 A
BC-65P 14D	70-335	6.500	800	700-3.350	1.400	490	2.400	1.900	974	1.950	313	368	210	80	4 A
BC-65P 16D	70-332	6.500	800	700-3.320	1.600	490	2.400	1.900	974	2.010	348	363	210	80	4 A

Notes:

- Two hydraulic functions.
- Standard colour: clamp body RAL3000 red, arms RAL7039 grey.
- Standard concrete steel ribs.

Options:

- Special colourless pigment-free arm finish
- Special openings.
- Both arms non-pivoted.
- Alternative arm facings: smooth round bars, special wave rebars, dimples.
- Load backrest.
- Cylinder protection.
- Non-sideshifting versions: No add-on price

