


Paper Roll Clamps, 180-degree Rotation

Models ARC-55

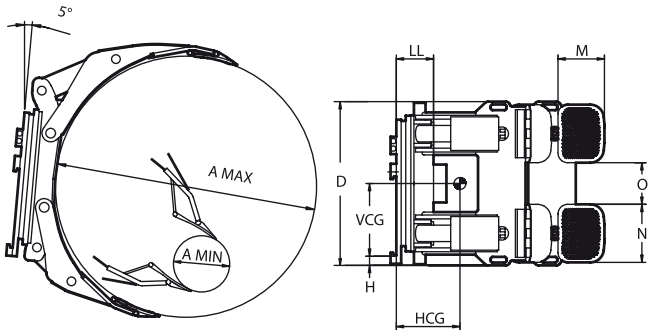



Unsplit long arm



Split long arm

Range: 3,700 - 5,500 Lbs.

- 180-degree rotation. Hydraulic cushioning in the vertical end positions.
- Rotating paper roll clamp for safe and effective vertical and horizontal roll handling.
- Slim and smooth arm and frame design, optimal visibility and advanced hydraulic operation.
- Pivoting arm movement. Short and long arms. Non-split long arm for single roll handling. Split arm for 1 - 2 roll handling.
- All hydraulic functions protected with built-in pressure relief valves and check valves. All service and maintenance points easily available.

Model	Capacity Lbs.	Load Center	Roll Range	Height	Weight Lbs.	Horizontal Center of Gravity	Vertical Center of Gravity	Effective Thickness	Contact Pads	Contact Pad Gap	Mounting Height	Mounting Class
	Q	*BP*	*A*	*D*	*W*	*HCG*	*VCG*	*LL*	*M x N*	*O*	*H*	
Single roll clamps - Unsplit long arm												
ARC-55-1051-P	5,500	25.5''	10"-51"	32.7''	1,600	9.1''	14.2''	7.5''	8.7"x11.8"	7.9''	2.4''	II/III
ARC-55-1055-P	4,800	27.5''	10"-55"	32.7''	1,640	10.1''	14.2''	7.5''	8.7"x11.8"	7.9''	2.4''	II/III
ARC-55-1060-P	4,600	29.9''	10"-60"	32.7''	1,690	11.3''	14.2''	7.5''	8.7"x11.8"	7.9''	2.4''	II/III
ARC-55-1063-P	4,400	31.5''	10"-63"	32.7''	1,710	11.8''	14.2''	7.5''	8.7"x11.8"	7.9''	2.4''	II/III
ARC-55-1672-P	3,700	36.0''	16"-72"	32.7''	1,820	14.1''	14.2''	7.9''	8.7"x11.8"	7.9''	2.4''	II/III
1 - 2 roll clamps - Split long arm												
ARC-55-1051-PS	5,500	25.5''	10"-51"	32.7''	1,570	8.9''	14.2''	7.5''	8.7"x11.8"	7.9''	2.4''	II/III
ARC-55-1055-PS	4,800	27.5''	10"-55"	32.7''	1,620	9.8''	14.2''	7.5''	8.7"x11.8"	7.9''	2.4''	II/III
ARC-55-1060-PS	4,600	29.9''	10"-60"	32.7''	1,670	11.0''	14.2''	7.5''	8.7"x11.8"	7.9''	2.4''	II/III
ARC-55-1063-PS	4,400	31.5''	10"-63"	32.7''	1,690	11.5''	14.2''	7.5''	8.7"x11.8"	7.9''	2.4''	II/III
ARC-55-1672-PS	3,700	36.0''	16"-72"	32.7''	1,800	13.8''	14.2''	7.9''	8.7"x11.8"	7.9''	2.4''	II/III

Notes:

- All models with hydraulically positionable short arm.
- Two hydraulic functions required.
- See hydraulic specifications page for pressure and flow rate recommendations.
- Standard contact pads: cast pad with high-friction surface.
- Minimum 5-degree forward tilt on lift mast is required for horizontal handling.
- For 0-degree tilt, special arms are available. Consult Bolzoni.

Options:

- Special roll ranges.
- Arm height D= 40.7”
- Fixed (non-moving) short arm.
- Contact pad options:
  - steel-sprayed
  - rubber faced
  - polyurethane faced
  - full length contact pads.

CERTIFIED ISO 9001 MANUFACTURER

79001206US - 1014

BOLZONI AURAMO Inc.
17635 HOFFMAN WAY - HOMEWOOD, ILLINOIS 60430 (U.S.A.)
TEL. +1-800 358 54 38 (U.S.A. only) - TEL. +1-708 957 88 09
FAX +1-708 957 88 32

7711 HIGHWAY 278, SULLIGENT, ALABAMA 35586 (U.S.A.)
TEL. +1-205 698 1231

www.bolzonigroup.com - insidesales@bolzoniauramo-usa.com

BOLZONI GROUP