

# Pulp Bale Clamps

## Models B-P



The Bolzoni Auramo model B-P pulp bale clamps are specifically designed for heavy-duty handling of pulp bales in the paper industry and logistics.

With capacities ranging from 3,500 to 7,200 Lbs. @ 24" load center and with a wide choice of opening ranges and arm lengths, this clamp is the ideal choice for all pulp handling operations.


All clamps in the range provide a high level of clamping force assuring safe bale handling.

The Bolzoni Auramo pulp bale clamps are available in a wide range of capacities and options, representing the best solution to the widest variety of handling needs.

### Features:

- Strong steel profile frame specifically conceived for heavy-duty handling. Very rigid frame structure with single piece double "T" profile.
- Superior visibility through, around and above the clamp frame makes this bale clamp safe and easy to use.
- Arm welded directly to the sliding profile with reinforced elbow provides strength and rigidity of the arms. Robust and thin arm profile, allowing tight and efficient bale stacking and damage-free knifing. Round steel rods inside the arms for greater friction and better gripping in waste bale handling. Slot in the upper arm position for easy installation on the forklift truck. Replaceable wear bars welded under the frame and the arms provide additional wear protection.
- Easily replaceable long lasting bearings requiring minimum service and lubrication.
- Hydraulic valve well protected behind the frame.
- Pressure relief valve on sideshifting, opening and clamping to prevent any damage to the clamp and the load.
- Built-in integral sideshift guarantees precise and efficient handling.
- Regenerative valve for higher operation speed.
- Self-aligning cylinder fixing with greasers to avoid breakage.



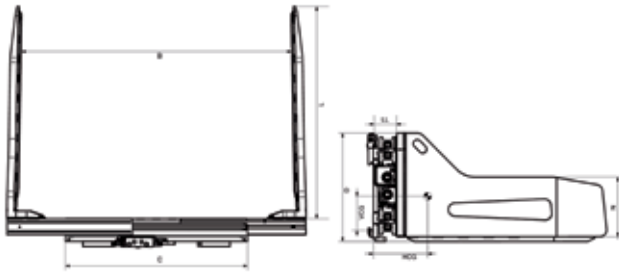

**Range:** 3,500 - 7,200 Lbs.

- Specifically designed for handling pulp bales.
- Strong double T-profile frame.
- Robust arm profile with thin design.
- Excellent visibility.
- Gripping steel rods inside the arms.
- Wear bars under bale arms and frame for better protection and easy replacement.
- Integral sideshift to best position the load.

Model	Code	Capacity Lbs. @ 24"	Opening Range at arm tip		Arm Length	Arm Height	Frame Width	Minimum Carriage Width	Height	Weight Lbs.	Horizontal Center of Gravity	Vertical Center of Gravity	Effective Thickness	Mounting Class
		Q	B min	B max	L	N	C	FL	D	W	HCG	VCG	LL	
B-35P 10A	64-197	3,500	23.9"	76.2"	39.4"	15.7"	38.2"	27.2"	24.4"	818	10.9"	11.1"	4.8"	II
B-35P 12A	64-197	3,500	23.6"	76.0"	47.2"	15.7"	38.2"	27.2"	24.4"	877	13.3"	10.9"	4.8"	II
B-35P 16A	64-197	3,500	23.1"	75.4"	63.0"	15.7"	38.2"	27.2"	24.4"	1,036	18.5"	10.6"	4.8"	II
B-50P 10A	65-187	5,000	24.2"	72.2"	39.4"	17.7"	41.7"	33.1"	27.9"	1,379	12.4"	8.9"	5.2"	II
B-50P 12A	65-187	5,000	23.9"	72.0"	47.2"	17.7"	41.7"	33.1"	27.9"	1,423	12.5"	8.9"	5.2"	II
B-50P 10A	50-185	5,000	18.3"	71.5"	39.4"	17.7"	46.5"	33.1"	27.9"	1,507	13.2"	9.3"	5.2"	II
B-50P 12A	50-185	5,000	18.0"	71.2"	47.2"	17.7"	46.5"	33.1"	27.9"	1,553	13.3"	9.3"	5.2"	II
B-55P 10B	63-187	5,500	23.4"	72.2"	39.4"	17.7"	44.1"	36.6"	32.0"	1,586	12.4"	10.6"	5.6"	III
B-55P 12B	63-187	5,500	23.2"	72.0"	47.2"	17.7"	44.1"	36.6"	32.0"	1,650	12.3"	10.7"	5.6"	III
B-55P 10B	62-208	5,500	23.0"	80.5"	39.4"	17.7"	48.4"	36.6"	32.0"	1,692	12.3"	10.7"	5.6"	III
B-55P 12B	62-208	5,500	22.8"	80.2"	47.2"	17.7"	48.4"	36.6"	32.0"	1,756	12.2"	10.7"	5.6"	III
B-72P 10B	63-199	7,200	23.4"	77.0"	39.4"	17.7"	46.5"	36.6"	32.2"	1,808	12.3"	10.9"	6.0"	III
B-72P 12B	63-199	7,200	23.1"	76.7"	47.2"	17.7"	46.5"	36.6"	32.2"	1,918	12.4"	10.8"	6.0"	III
B-72P 10B	65-213	7,200	24.2"	82.5"	39.4"	17.7"	48.8"	36.6"	32.2"	1,852	12.3"	10.9"	6.0"	III
B-72P 12B	65-212	7,200	23.9"	81.8"	47.2"	17.7"	48.8"	36.6"	32.2"	1,962	12.4"	10.9"	6.0"	III
B-72P 15B	65-237	7,200	23.5"	91.2"	59.1"	17.7"	55.1"	43.9"	32.2"	2,312	16.4"	10.4"	6.0"	III

### Notes:

- Two hydraulic functions required.
- Pressure relief valve on clamping and sideshifting.
- Check valve.
- Integral sideshift.
- Special arms configuration for handling inside container and rail box.

### Options:

- Special openings.
- Pressure gauge.
- Load backrest.
- Arms of various dimensions.
- Colorless arm finish.
- Front protection shield.
- Dual mounting available.



**BOLZONI AURAMO CANADA LTD.**  
90C BRUNSWICK BLVD DOLLARD-DES-ORMEAUX,  
QUEBEC  
H9B 2C5 CANADA  
Tel. 800-685-7871 - Fax 514-685-5238

[www.bolzonigroup.com](http://www.bolzonigroup.com)

**BOLZONI AURAMO CANADA LTD.**  
889 PANTERA DRIVE UNIT #6 MISSISSAUGA  
ONTARIO  
L4W 2R9 CANADA  
Tel. 800-685-7871

[sales.ca@bolzoni-auramo.com](mailto:sales.ca@bolzoni-auramo.com)

