


Pulp Bale Clamps

Models BA-220P

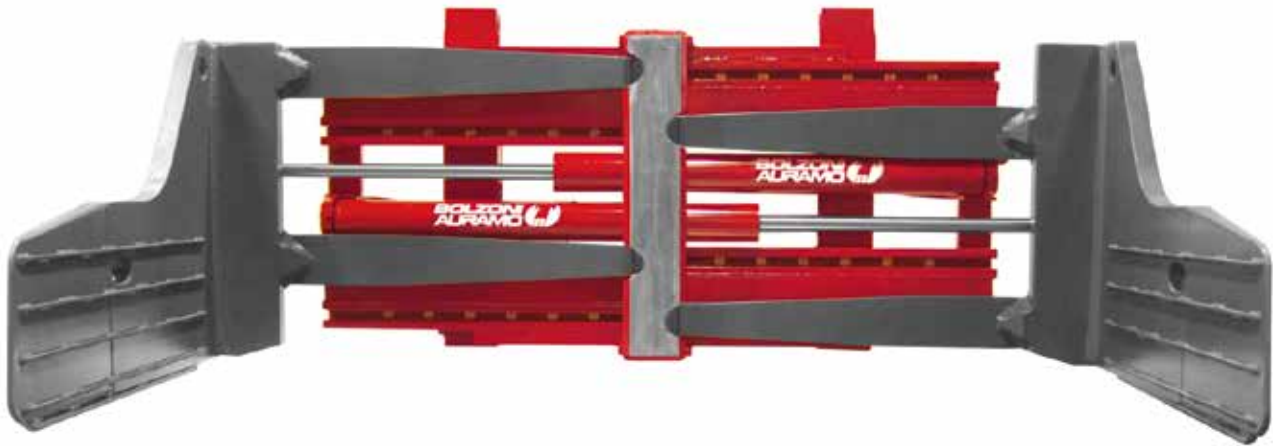


The Bolzoni Auramo clamp BA-220P model is designed for effective and safe heavy-duty pulp bale handling.

Typical applications are in pulp mills, warehouses, terminals, stevedoring docks as well as in any other loading and unloading operations in the logistic chain.

Features:

- Steel profile frame with strong "T" profile arm carrier.
- Welded profile frame with heavy-duty bearings offering performance advantages and longer lifetime.
- Arms welded to the arm carriers. Colorless arm finish.
- Slim and strong arm design ensures easy knifing and tight stacking.
- Left-side arm pivots to compensate differences in bale unit sizes. Compact and strong pivot design offers exceptional strength and service life. Fixed left arm is available on request.
- Side shift valve with built-in pressure relief valve for both clamping and opening.
- Capacity 22,000 Lbs at 31" load center with a wide choice of arm configurations and mounting options enable efficient handling of 1 to 4 pulp bale units of all sizes.
- Clamping cylinders with flexible mountings for heavy duty handling.



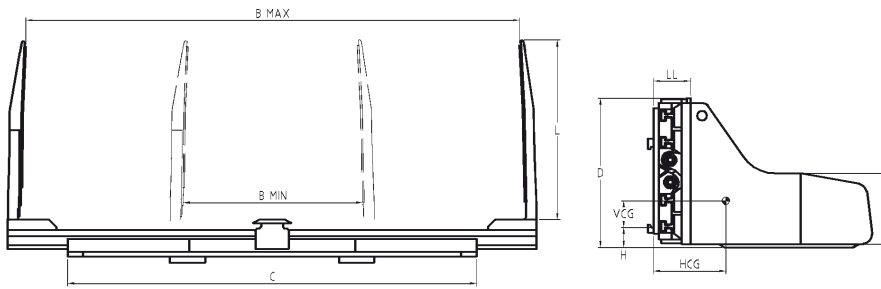

Range: 22,000 Lbs.

- Heavy-duty pulp bale clamp for handling of 4 units.
- Steel profile frame with strong "T" profile arm carrier.
- Colorless arms welded directly to the arm carriers. Left arm pivoted.
- Slim and strong arm design ensures easy knifing and tight stacking.
- Built-in integral sideshift improves positioning.

Model	Code	Capacity Lbs.	Load Center	Opening Range	Arm Length	Arm Height	Frame Width	Minimum Carriage Width	Height	Weight Lbs.	Horizontal Center of Gravity	Effective Thickness	Mounting Height	Mounting Class
		Q	BP	B	L	N	C	FL	D	W ^①	HCG ^①	LL ^①	H	
BA-220P 14	73-326	22,000	31.5"	28.7"-128.3"	55.1"	21.7"	95.3"	①	44.3"	7,270	13.0"	12.6"	①	①
BA-220P 16	73-326	22,000	31.5"	28.7"-128.3"	63.0"	21.7"	95.3"	①	44.3"	7,600	14.6"	12.6"	①	①
BA-220P 14	73-346	22,000	31.5"	28.7"-136.2"	55.1"	21.7"	103.1"	①	44.3"	7,710	12.6"	12.6"	①	①
BA-220P 16	73-346	22,000	31.5"	28.7"-136.2"	63.0"	21.7"	103.1"	①	44.3"	8,040	14.2"	12.6"	①	①
BA-220P 16	73-366	22,000	31.5"	28.7"-144.1"	55.1"	21.7"	111.0"	①	44.3"	7,930	12.2"	12.6"	①	①
BA-220P 14	73-366	22,000	31.5"	28.7"-144.1"	63.0"	21.7"	111.0"	①	44.3"	8,260	13.8"	12.6"	①	①
BA-220P 16	73-386	22,000	31.5"	28.7"-152.0"	55.1"	21.7"	118.9"	①	44.3"	8,150	12.2"	12.6"	①	①
BA-220P 14	73-386	22,000	31.5"	28.7"-152.0"	63.0"	21.7"	118.9"	①	44.3"	8,480	13.4"	12.6"	①	①
BA-220P 14	73-406	22,000	31.5"	28.7"-159.8"	55.1"	21.7"	126.8"	①	44.3"	8,370	11.8"	12.6"	①	①
BA-220P 16	73-406	22,000	31.5"	28.7"-159.8"	63.0"	21.7"	126.8"	①	44.3"	8,700	13.4"	12.6"	①	①

Notes:

- Two hydraulic functions required.
 - ① Consult Bolzoni Auramo regarding factory specifications for special mounting.

Options:

- Special opening ranges.
- Arm length and arm finish.
- Center arm.
- Non-pivoted left arm.
- Horizontal load bumper on sliding arms.
- Central vertical load bumper plate.

