

Waste Paper Bale Clamps

Models BA-W



The Bolzoni Auramo series BA-W waste paper bale clamps are designed for heavy-duty waste paper bale handling.

BA series are designed for use on both forklifts and wheel loaders. Extremely thin and light design for high residual capacity and with optimal visibility.




High lifting capacity and wide choice of different openings and arm lengths enable efficient handling of all sizes of waste paper bale units.

Thin arm design makes tight bale stacking and knifing between bales easy. Fixed bale arms secure handling even with varying bale dimensions. Wear strips placed in the lower part of the frame and the arms.

The clamp frame is made of welded steel profiles. The special steel T-profile arm carriers make the clamp extremely strong and rigid. Arm carrier bearings are easily replaceable and require a minimum amount of lubrication.

A variety of arm, rib and mounting options, as well as hydraulic options are available on request.



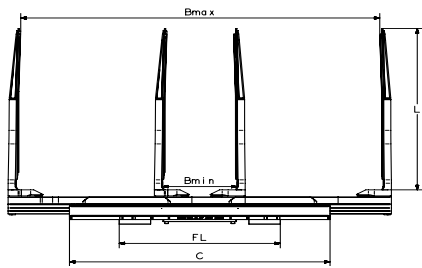

Range: 11,000 - 15,400 Lbs.

Features:

- Bale and other recycling applications
- Arms welded directly to the arm carriers, special welded arm corner
- Heavy duty arm and body design with optimal visibility.
- Steel profile frame, strong T-profile arm carriers.
- Slim arm design.
- Built-in integral sideshift.

Model	Code	Capacity Lbs.	Load Center	Opening Range		Arm Length	Arm Height	Frame Width	Minimum Carriage Width	Height	Weight Lbs.	Horizontal Center of Gravity	Vertical Center of Gravity	Effective Thickness	Mounting Height	Mounting Class
				Q	BP											
BA-110W 12C	74-262	11,000	35,4"	29,1"	103,1"	47,2"	19,3"	63,0"	55,1"	34,0"	3,480	11,6"	15,2"	10,6"	2,6"	IV
BA-110W 14C	74-260	11,000	35,4"	29,1"	102,4"	55,1"	19,3"	63,0"	55,1"	34,0"	3,590	13,0"	14,9"	10,6"	2,6"	IV
BA-110W 16C	74-258	11,000	35,4"	29,1"	101,6"	63,0"	19,3"	63,0"	55,1"	34,0"	3,700	14,4"	14,7"	10,6"	2,6"	IV
BA-110W 18C	74-256	11,000	35,4"	29,1"	100,8"	70,9"	19,3"	63,0"	55,1"	34,0"	3,830	16,0"	14,5"	10,6"	2,6"	IV
BA-110W 12C	74-282	11,000	35,4"	29,1"	111,0"	47,2"	19,3"	70,9"	55,1"	34,0"	3,720	11,1"	15,2"	10,6"	2,6"	IV
BA-110W 14C	74-280	11,000	35,4"	29,1"	110,2"	55,1"	19,3"	70,9"	55,1"	34,0"	3,830	12,4"	15,0"	10,6"	2,6"	IV
BA-110W 16C	74-278	11,000	35,4"	29,1"	109,4"	63,0"	19,3"	70,9"	55,1"	34,0"	3,940	13,8"	14,8"	10,6"	2,6"	IV
BA-110W 18C	74-276	11,000	35,4"	29,1"	108,7"	70,9"	19,3"	70,9"	55,1"	34,0"	4,050	15,4"	14,6"	10,6"	2,6"	IV
BA-140W 12C	72-320	14,000	35,4"	28,3"	126,0"	47,2"	19,3"	86,6"	55,1"	39,3"	4,780	10,9"	15,5"	12,0"	2,6"	IV
BA-140W 14C	72-319	14,000	35,4"	28,3"	125,6"	55,1"	19,3"	86,6"	55,1"	39,3"	4,910	12,0"	15,3"	12,0"	2,6"	IV
BA-140W 16C	72-318	14,000	35,4"	28,3"	125,2"	63,0"	19,3"	86,6"	55,1"	39,3"	5,040	13,3"	15,2"	12,0"	2,6"	IV
BA-140W 18C	72-316	14,000	35,4"	28,3"	124,4"	70,9"	19,3"	86,6"	55,1"	39,3"	5,180	14,6"	15,0"	12,0"	2,6"	IV
BA-140W 12C	72-340	14,000	35,4"	28,3"	133,9"	47,2"	19,3"	94,5"	74,8"	39,3"	4,960	10,4"	15,6"	12,0"	2,6"	IV
BA-140W 14C	72-339	14,000	35,4"	28,3"	133,5"	55,1"	19,3"	94,5"	74,8"	39,3"	5,070	11,5"	15,4"	12,0"	2,6"	IV
BA-140W 16C	72-337	14,000	35,4"	28,3"	132,7"	63,0"	19,3"	94,5"	74,8"	39,3"	5,200	12,7"	15,2"	12,0"	2,6"	IV
BA-140W 18C	72-336	14,000	35,4"	28,3"	132,3"	70,9"	19,3"	94,5"	74,8"	39,3"	5,330	14,0"	15,0"	12,0"	2,6"	IV
BA-150W 12C	72-320	15,400	35,4"	28,3"	126,0"	47,2"	19,3"	86,6"	55,1"	39,3"	5,070	10,6"	15,9"	12,0"	2,6"	IV
BA-150W 14C	72-319	15,400	35,4"	28,3"	125,6"	55,1"	19,3"	86,6"	55,1"	39,3"	5,200	11,7"	15,7"	12,0"	2,6"	IV
BA-150W 16C	72-318	15,400	35,4"	28,3"	125,2"	63,0"	19,3"	86,6"	55,1"	39,3"	5,330	12,9"	15,5"	12,0"	2,6"	IV
BA-150W 18C	72-316	15,400	35,4"	28,3"	124,4"	70,9"	19,3"	86,6"	55,1"	39,3"	5,460	14,1"	15,3"	12,0"	2,6"	IV
BA-150W 12C	72-340	15,400	35,4"	28,3"	133,9"	47,2"	19,3"	94,5"	74,8"	39,3"	5,240	10,2"	15,9"	12,0"	2,6"	IV
BA-150W 14C	72-339	15,400	35,4"	28,3"	133,5"	55,1"	19,3"	94,5"	74,8"	39,3"	5,350	11,2"	15,7"	12,0"	2,6"	IV
BA-150W 16C	72-337	15,400	35,4"	28,3"	132,7"	63,0"	19,3"	94,5"	74,8"	39,3"	5,480	12,4"	15,5"	12,0"	2,6"	IV
BA-150W 18C	72-336	15,400	35,4"	28,3"	132,3"	70,9"	19,3"	94,5"	74,8"	39,3"	5,620	13,6"	15,4"	12,0"	2,6"	IV

Notes:

- Two hydraulic functions required.
- Pressure relief valve on clamping, opening and sideshift
- Built-in integral sideshift.

Options:

- Special openings.
- Special arm lengths
- Full material arm tip
- Arms welded to the arm carriers
- Colourless arm finish.
- Load backrest.
- Cylinder protection.

