

Fork Positioners

Models FF



Fork Positioners are becoming more and more a standard piece of equipment for a forklift truck.

In particular the Bolzoni Auramo shaft-guided type fork positioners, model FF, are largely utilized in the automotive industry, air port logistics, freight forwarding and general logistics processes.

Thanks to the fork positioning and sideshifting functions, this fork positioner is very versatile and is the ideal attachment for a wide range of pallet handling applications, especially in heavy-duty environments.

Features:

- Excellent visibility.
- Double shaft guided system sliding on hardened chrome bars.
- Robust frame.
- Accurate positioning, thanks to the hydraulic adjustment of the forks within the frame width.
- ISO fork carriers for use with standard lift truck forks without any modification.
- Fork carriers are predrilled to fit bolt-on forks with 3 holes.
- Fork stops adjustable according to fork widths.
- Adjustable lower hooks.
- High performance bushings protected with wipers, for extreme long life and simple maintenance.
- Internal grease reservoir for longest service intervals: more than 2,000 working hours maintenance-free.




Fork Positioners, High Performance, Shaft-guided

Models FF (with Separate Sideshift)

Range: 4,600 - 13,200 Lbs.

Features:

- Separate sideshift.
- Adjust forks within the frame width.
- Excellent visibility and minimum residual capacity calculation.
- Accurate fork movement as the fork carriers move on two round chromed bars.
- For handling of palletised loads.
- Standard lift truck forks can be fitted, without any modification.

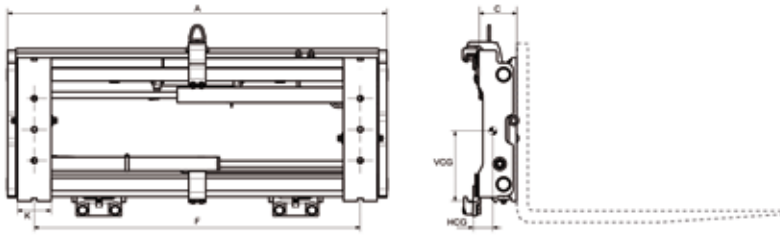

Model	Capacity Lbs. @ 24"	Mounting Class	Opening Range to Center of Fork Arm Carrier	Frame Width	Required Truck Carriage Width	Total Sideshift	Fork Carrier Width	Weight Lbs.	Load Centre	Horizontal Centre of Gravity
	Q		F	A		S	K	M	C	HCG
FF 25 354A	4,600	II	7.5" - 27.9"	35.4"	28.3"	8"	4.72"	254	5.3"	2.7"
FF 25 394A	4,600	II	7.5" - 31.9"	39.4"	32.7"	8"	4.72"	274	5.3"	2.6"
FF 25 409A	4,600	II	7.5" - 33.5"	40.9"	35.8"	8"	4.72"	287	5.3"	2.6"
FF 25 433A	4,600	II	7.5" - 35.8"	43.3"	35.8"	8"	4.72"	294	5.3"	2.6"
FF 25 453A	4,600	II	7.5" - 37.8"	45.3"	37.8"	8"	4.72"	302	5.3"	2.6"
FF 25 490A	4,600	II	7.5" - 41.5"	49.0"	37.8"	8"	4.72"	408	6.2"	2.9"
FF 25 512A	4,600	II	7.5" - 43.7"	51.2"	37.8"	8"	4.72"	468	6.2"	2.9"
FF 25 552A	4,600	II	7.5" - 47.6"	55.2"	37.8"	8"	4.72"	499	6.2"	2.9"
FF 26 354A	5,500	II	7.5" - 27.9"	35.4"	28.3"	8"	4.72"	254	5.3"	2.7"
FF 26 394A	5,500	II	7.5" - 31.9"	39.4"	32.7"	8"	4.72"	274	5.3"	2.6"
FF 26 409A	5,500	II	7.5" - 33.5"	40.9"	35.8"	8"	4.72"	287	5.3"	2.6"
FF 26 433A	5,500	II	7.5" - 35.8"	43.3"	35.8"	8"	4.72"	294	5.3"	2.6"
FF 26 453A	5,500	II	7.5" - 37.8"	45.3"	37.8"	8"	4.72"	302	5.3"	2.6"
FF 26 490A	5,500	II	7.5" - 41.5"	49.0"	37.8"	8"	4.72"	408	6.2"	2.9"
FF 26 512A	5,500	II	7.5" - 43.7"	51.2"	37.8"	8"	4.72"	468	6.2"	2.9"
FF 26 552A	5,500	II	7.5" - 47.6"	55.2"	37.8"	8"	4.72"	499	6.2"	2.9"
FF 35 443B	6,400	III	7.5" - 35.8"	43.3"	35.0"	8"	4.72"	393	6.1"	2.8"
FF 35 453B	6,400	III	7.5" - 37.8"	45.3"	35.0"	8"	4.72"	406	6.1"	2.8"
FF 35 472B	6,400	III	7.5" - 39.7"	47.2"	42.9"	8"	4.72"	448	6.2"	3.0"
FF 35 512B	6,400	III	7.5" - 43.7"	51.2"	42.9"	8"	4.72"	475	6.2"	2.9"
FF 35 531B	6,400	III	7.5" - 45.7"	53.1"	42.9"	8"	4.72"	490	6.2"	2.9"
FF 36 551B	7,900	III	9.4" - 45.7"	55.1"	47.2"	8"	5.90"	700	7.4"	3.4"
FF 36 608B	7,900	III	9.4" - 51.4"	60.8"	47.2"	8"	5.90"	772	7.4"	3.5"
FF 50 516B	11,000	III	9.4" - 42.2"	51.6"	35.4"	8"	5.90"	638	7.0"	3.3"
FF 50 531B	11,000	III	9.4" - 43.7"	53.1"	35.4"	8"	5.90"	651	7.0"	3.3"
FF 50 551B	11,000	III	9.4" - 45.7"	55.1"	47.2"	8"	5.90"	704	7.3"	3.5"
FF 50 630B	11,000	III	9.4" - 53.5"	63.0"	47.2"	8"	5.90"	781	7.3"	3.4"
FF 60 516C	13,200	IV	9.0" - 41.3"	51.6"	49.2"	8"	5.90"	1,004	6.6"	3.1"
FF 60 574C	13,200	IV	9.0" - 45.3"	57.4"	49.2"	8"	5.90"	1,082	6.6"	3.1"
FF 60 614C	13,200	IV	9.0" - 49.2"	61.4"	49.2"	8"	5.90"	1,104	6.6"	3.1"
FF 60 732C	13,200	IV	9.0" - 57.1"	73.2"	53.1"	8"	5.90"	1,181	6.6"	3.0"
FF 60 791C	13,200	IV	9.0" - 61.0"	79.1"	57.1"	8"	5.90"	1,214	6.6"	3.0"
FF 60 870C	13,200	IV	9.0" - 68.9"	87.0"	57.1"	8"	5.90"	1,291	6.6"	3.0"

Notes:

- Two hydraulic functions required.
- The unit has a separate sideshift, stroke 4" + 4".
- Lower hooks adjustable.
- ITA fork carriers are fitted with adjustable fork stops for variation in fork widths of up to "K" + 0.39".

- It is recommended that extra wide forks should be bolted on.
- For use with standard forks (not included in price).
- Fork carriers are predrilled with 3 holes.

Options:

- Special widths., and special drill holes.
- Load backrest.
- Quick disconnect lower hooks.
- Model with reach forks.
- Bolt-on forks.

BOLZONI AURAMO CANADA LTD.
 90C BRUNSWICK BLVD DOLLARD-DES-ORMEAUX,
 QUEBEC
 H9B 2C5 CANADA
 Tel. 800-685-7871 - Fax 514-685-5238

www.bolzonigroup.com

BOLZONI AURAMO CANADA LTD.
 889 PANTERA DRIVE UNIT #6 MISSISSAUGA
 ONTARIO
 L4W 2R9 CANADA
 Tel. 800-685-7871

sales.ca@bolzoni-auramo.com

**BOLZONI
 AURAMO**

