

Fork Positioners

Models FP



The Bolzoni Auramo FP model fork positioner provides fast and accurate fork positioning as the forks operate on a round chromed bar. In addition to handling the usual palletised loads this unit allows to pick up cylindrical products such as drums and coils to be handled safely by ensuring stability.


This unit provides exceptional visibility thanks to the wide central window and the sloped shape of the upper frame.

Being the forks directly welded to the slides, the backlash typical of the hook-on forks is completely eliminated.

Also available in non sideshift version, FN model.

Available with sliding rollers on forks.



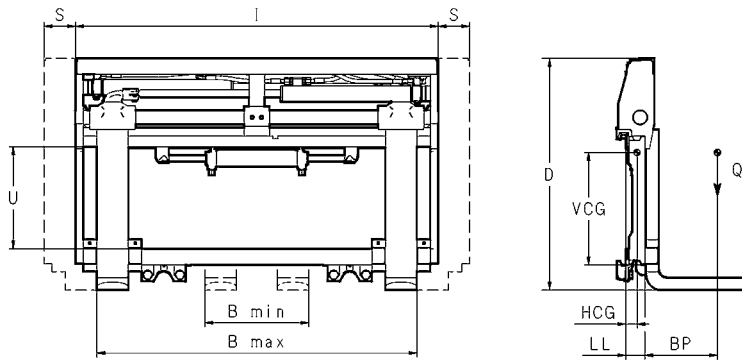

Range: 5,500 - 10,000 Lbs.

- Separate sideshift.
- Bar mounted forks.
- Accurate fork positioning, operated on a round chromed bar with bushings.
- For handling of palletized loads.
- For handling of horizontal drums and coils with the addition of a check valve.
- Excellent visibility, strength and versatility.
- Forks included in the supply can be fitted on lower rollers (on option).

Model	Capacity Lbs. @ 24"	Mounting Class	Opening Range out to out		Overall Width	Minimum Carriage Width	Total Sideshift	Height	Fork Support Width	Side Visibility	Weight Lbs.	Effective Thickness	Horizontal Center of Gravity	Vertical Center of Gravity
	Q		B min	B max										
FP 25 08A	5,500	II	14.0"	27.2"	31.5"	28.4"	8"	28.7"	5.0"	12.6"	165	2.4"	1.41"	13.9"
FP 25 X9A	5,500	II	14.0"	32.7"	37.0"	32.7"	8"	28.7"	5.0"	12.6"	194	2.4"	1.41"	13.9"
FP 25 09A	5,500	II	14.0"	34.3"	38.6"	32.7"	8"	28.7"	5.0"	12.6"	203	2.4"	1.41"	13.9"
FP 25 10A	5,500	II	14.0"	39.0"	43.3"	35.9"	8"	28.7"	5.0"	12.6"	227	2.4"	1.41"	13.9"
Forks: Max. length 63". Add-on price per each 4" length increase														
FP 35 X9B	6,500	III	15.2"	33.9"	38.6"	29.9"	8"	33.6"	5.0"	16.3"	235	2.6"	1.49"	16.9"
FP 35 10B	6,500	III	15.2"	38.6"	43.3"	35.0"	8"	33.6"	5.0"	16.3"	264	2.6"	1.49"	16.9"
FP 35 11B	6,500	III	15.2"	40.6"	45.3"	35.0"	8"	33.6"	5.0"	16.3"	275	2.6"	1.49"	16.9"
FP 35 12B	6,500	III	15.2"	44.3"	49.0"	42.9"	8"	33.6"	5.0"	16.3"	299	2.6"	1.49"	16.9"
Forks: Max. length 63". Add-on price per each 4" length increase														
FP 49 10B	10,000	III	16.4"	36.7"	43.3"	33.5"	8"	37.6"	6.0"	14.3"	426	3.0"	1.85"	16.6"
FP 49 11B	10,000	III	16.4"	38.6"	45.3"	33.5"	8"	37.6"	6.0"	14.3"	446	3.0"	1.85"	16.6"
FP 49 12B	10,000	III	16.4"	42.4"	49.0"	35.5"	8"	37.6"	6.0"	14.3"	471	3.0"	1.85"	16.6"
FP 49 13B	10,000	III	16.4"	46.5"	53.1"	38.2"	8"	37.6"	6.0"	14.3"	498	3.0"	1.85"	16.6"
FP 49 15B	10,000	III	16.4"	54.4"	61.0"	47.3"	8"	37.6"	6.0"	14.3"	550	3.0"	1.85"	16.6"
Forks: Max. length 63". Add-on price per each 4" length increase														

Notes:

- Two hydraulic functions required.
- Total sideshift stroke 8".
- Weight, effective thickness and center of gravity are given without forks.
- Standard forks:
 - FP25.... 42" x 5" x 1.50" class II 5,500 Lbs.
 - FP35.... 42" x 5" x 1.75" class III 6,500 Lbs.
 - FP49.... 42" x 6" x 2.00" class III 10,000 Lbs.

Options:

- Different fork lengths.
- Flow divider valve.
- Pressure relief valve.
- Load backrest.
- Check valve for low clamping pressure max. 700 PSI.



BOLZONI AURAMO CANADA LTD.
 90C BRUNSWICK BLVD DOLLARD-DES-ORMEAUX,
 QUEBEC
 H9B 2C5 CANADA
 Tel. 800-685-7871 - Fax 514-685-5238

www.bolzonigroup.com

BOLZONI AURAMO CANADA LTD.
 889 PANTERA DRIVE UNIT #6 MISSISSAUGA
 ONTARIO
 L4W 2R9 CANADA
 Tel. 800-685-7871

sales.ca@bolzoni-auramo.com

