

Paper Roll Clamps, 180-degree Rotation

Models AR-37

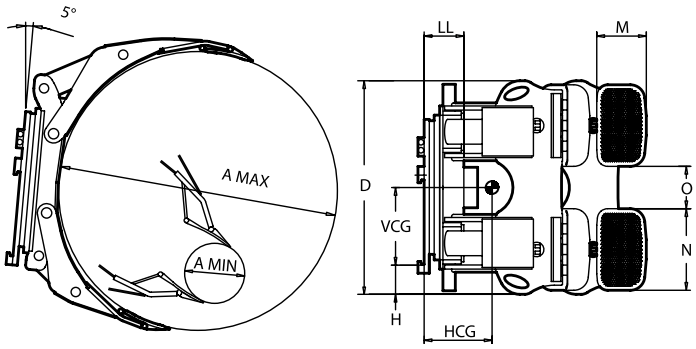


Range: 3700 Kg - 4000 Kg

- Rotating paper roll clamp for safe and effective vertical and horizontal roll handling.
- Slim and smooth arm and frame design, optimal visibility and advanced hydraulic operation.
- Pivoting arm movement. Short and long arms. Non-split long arm for single roll handling. Split arm for 1 - 2 roll handling.
- 180-degree rotation. Hydraulic cushioning in the vertical end positions.
- All hydraulic functions protected with built-in pressure relief valves and check valves. All service and maintenance points easily available.



Unsplit long arm



Split long arm

Model	Capacity	Load Centre	Roll Range	Height	Weight	Horizontal Centre of Gravity	Vertical Centre of Gravity	Effective Thickness	Contact Pads	Contact Pad Gap	Mounting Height	Mounting Class
	Q kg	*BP mm*	*A mm*	*D mm*	*W Kg*	*HCG mm*	*VCG mm*	*LL mm*	*M x N mm*	*O mm*	*H mm*	*ISO 2328*
Single roll clamps - Unsplit long arm												
AR-37RH-13F	4.000	650	450-1.300	1.135	995	276	435	190	280x400	300	130	3 / 4 A
AR-37RH-13	4.000	650	250-1.300	1.135	1.000	276	435	190	280x400	300	130	3 / 4 A
AR-37RH-14F	3.900	700	450-1.400	1.135	1.005	296	435	190	280x400	300	130	3 / 4 A
AR-37RH-14	3.900	700	250-1.400	1.135	1.010	296	435	190	280x400	300	130	3 / 4 A
AR-37RH-15F	3.800	760	500-1.520	1.135	1.015	321	435	190	280x400	300	130	3 / 4 A
AR-37RH-15	3.800	760	250-1.520	1.135	1.020	321	435	190	280x400	300	130	3 / 4 A
AR-37RH-16F	3.700	800	500-1.600	1.135	1.025	335	435	190	280x400	300	130	3 / 4 A
AR-37RH-16	3.700	800	250-1.600	1.135	1.030	335	435	190	280x400	300	130	3 / 4 A
1 - 2 roll clamps - Split long arm												
AR-37RJ-13F	4.000	650	450-1.300	1.135	980	272	435	190	280x400	300	130	3 / 4 A
AR-37RJ-13	4.000	650	250-1.300	1.135	985	272	435	190	280x400	300	130	3 / 4 A
AR-37RJ-14F	3.900	700	450-1.400	1.135	990	292	435	190	280x400	300	130	3 / 4 A
AR-37RJ-14	3.900	700	250-1.400	1.135	995	292	435	190	280x400	300	130	3 / 4 A
AR-37RJ-15F	3.800	760	500-1.520	1.135	1.000	316	435	190	280x400	300	130	3 / 4 A
AR-37RJ-15	3.800	760	250-1.520	1.135	1.005	316	435	190	280x400	300	130	3 / 4 A
AR-37RJ-16F	3.700	800	500-1.600	1.135	1.010	330	435	190	280x400	300	130	3 / 4 A
AR-37RJ-16	3.700	800	250-1.600	1.135	1.015	330	435	190	280x400	300	130	3 / 4 A

Notes:

- Two hydraulic functions required.
- Models AR-37RHF/RJF with fixed (non-moving) short arm.
- Models AR-37RH/RJ with hydraulically positionable short arm.
- Standard contact pads: cast pad with high-friction surface.
- Minimum 5-degree forward tilt on lift mast is required for horizontal handling.
- For 0-degree tilt, special arms are available. Consult Bolzoni Auramo.

Options:

- Special roll ranges.
- Arm height D = 1235 mm.
- Contact pad options:
  - steel-sprayed
  - rubber faced
  - polyurethane faced
  - full length contact pads.

CERTIFIED ISO 9001 MANUFACTURER

79BA0009E - 0217

AURAMO OY
PL1001 (YRITTÄJÄNKATU 4) - FIN-04401 JÄRVENPÄÄ - FINLAND - TEL: +358-9-82-931 - FAX: +358-9-2790-4710
www.bolzonigroup.com - sales.fi@bolzoni-auramo.com

BOLZONI AURAMO