Fork Positioners

Models MMP



The Bolzoni MMP Series fork positioner provides fast and accurate fork positioning as the fork carriers are sliding on a chromed bar, with self-lubricating bushings.

Standard lift truck forks perfectly fit the fork carriers, without any modification.

The forks perfect synchronisation movement is given by differentiate diameter cylinders. Furthermore, the fork carriers show an oversized structure and consequently this model can be considered the right attachment for "heavy duty" handling needs.

Together with fork positioner typical advantages of operator safety, productivity increase and product damage reduction, the MMP Series fork positioner is easy to use. With an excellent visibility, it offers great advantages for the lift truck operator.

Also available in non sideshifting version, MMN model.










BOLZONI

Fork Positioners with Fork Adapters

Models MMP *(Sideshifting)*

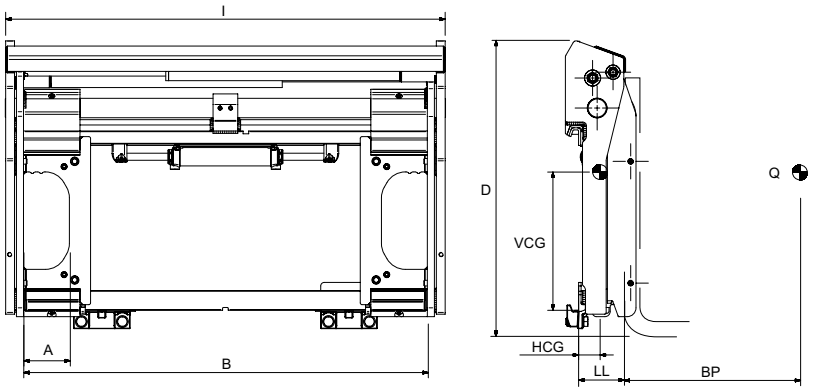

Range: 5,500 - 15,000 Lbs.

Plus:

- Separate sideshift.
- Standard forks of the truck can be used without modification.
- Fork carriers sliding on a chromed bar with bushings.
- Excellent visibility, strength and versatility.

Model	Capacity Lbs. @ 24"	Mounting Class	Opening Range ITI - OTO		Overall Width	Minimum Carriage Width	Total Sideshift	Height	Fork Support Width	Weight Lbs.	Effective Thickness	Horizontal Center of Gravity	Vertical Center of Gravity
	Q		*B*		*I*	*FL*	*S*	*D*	*A*	*W*	*LL*	*HCG*	*VCG*
MMP 25 X8A	5,500	II	3.9"	27.4"	31.5"	28.3"	8"	28.7"	5.2"	278	4.4"	2.1"	13.0"
MMP 25 X9A	5,500	II	3.9"	32.9"	37.0"	32.7"	8"	28.7"	5.2"	302	4.4"	2.1"	13.0"
MMP 25 10A	5,500	II	3.9"	36.8"	40.9"	35.8"	8"	28.7"	5.2"	316	4.4"	2.1"	13.0"
MMP 25 11A	5,500	II	3.9"	41.1"	45.3"	37.8"	8"	28.7"	5.2"	333	4.4"	2.1"	13.1"
MMP 25 12A	5,500	II	3.9"	44.7"	49.0"	37.8"	8"	28.7"	5.2"	411	4.7"	2.1"	12.2"
MMP 25 14A	5,500	II	3.9"	51.0"	55.1"	41.3"	8"	28.7"	5.2"	439	4.7"	2.1"	12.2"
MMP 35 10B	6,500	III	5.4"	39.1"	43.3"	35.0"	8"	33.0"	5.2"	437	5.3"	2.4"	15.5"
MMP 35 11B	6,500	III	5.4"	41.1"	45.3"	35.0"	8"	33.0"	5.2"	442	5.3"	2.4"	15.5"
MMP 35 12B	6,500	III	5.4"	45.0"	49.0"	42.9"	8"	33.0"	5.2"	453	5.3"	2.4"	15.5"
MMP 35 13B	6,500	III	5.4"	49.0"	53.1"	42.9"	8"	33.0"	5.2"	470	5.3"	2.4"	15.5"
MMP 49 11B	10,000	III	4.1"	39.4"	45.3"	33.5"	8"	35.0"	6.0"	662	5.7"	2.5"	16.1"
MMP 49 12B	10,000	III	4.1"	43.1"	49.0"	35.4"	8"	35.0"	6.0"	689	5.7"	2.5"	16.1"
MMP 49 13B	10,000	III	4.1"	47.2"	53.1"	38.2"	8"	35.0"	6.0"	713	5.7"	2.5"	16.0"
MMP 49 15B	10,000	III	4.1"	55.1"	61.0"	47.2"	8"	35.0"	6.0"	768	5.7"	2.4"	16.0"
MMP 49 16B	10,000	III	4.1"	59.4"	65.4"	49.6"	8"	35.0"	6.0"	795	5.7"	2.4"	16.0"
MMP 70 10C	15,000	IV	4.3"	34.6"	42.1"	35.4"	8"	41.7"	8.0"	979	6.5"	2.8"	20.4"
MMP 70 12C	15,000	IV	4.3"	39.8"	47.3"	35.4"	8"	41.7"	8.0"	1,052	6.5"	2.8"	20.4"
MMP 70 13C	15,000	IV	4.3"	45.6"	53.1"	35.4"	8"	41.7"	8.0"	1,135	6.5"	2.7"	20.4"
MMP 70 15C	15,000	IV	4.3"	52.5"	60.0"	39.4"	8"	41.7"	8.0"	1,232	6.5"	2.7"	20.4"
MMP 70 16C	15,000	IV	4.3"	57.5"	65.0"	39.4"	8"	41.7"	8.0"	1,302	6.5"	2.7"	20.4"
MMP 70 19C	15,000	IV	4.3"	67.3"	74.8"	53.1"	8"	41.7"	8.0"	1,441	6.5"	2.7"	20.4"
MMP 70 20C	15,000	IV	4.3"	71.2"	78.7"	55.9"	8"	41.7"	8.0"	1,497	6.5"	2.7"	20.4"
MMP 70 21C	15,000	IV	4.3"	78.3"	85.8"	55.9"	8"	41.7"	8.0"	1,597	6.5"	2.6"	20.4"
MMP 70 24C	15,000	IV	4.3"	87.0"	94.5"	68.9"	8"	41.7"	8.0"	1,720	6.5"	2.6"	20.4"

Notes:

- Two hydraulic functions required.
- Total sideshift stroke 8".
- Forks are not included in the attachment price.
- Weight and center of gravity are given without forks.
- Delivered without forks. Original lift truck forks can be fitted without any modification.
- Not for handling cylindrical loads.
- MMP25 and MMP35 accepted fork width 4"(add 2" to ITI) and 5".
- MMP49 accepted fork width 5"(add 2" to ITI) and 6".
- MMP70 accepted fork width 6"(add 4" to ITI) and 8".

Options:

- Special widths.
- Load backrest.
- Price reduction for model without sideshift (model MMN)
- Shaft guided fork models without fork carriers also available.
- MMP49: fork support width 8" (reduce ITI of 4").
- MM70: fork support width 10" (reduce ITI of 4") and 12" (reduce ITI of 8").

79BA0091US - 03.2025

BOLZONI Inc.
17635 HOFFMAN WAY - HOMEWOOD, ILLINOIS 60430 (U.S.A.) TEL.
+1-800 358 54 38 (U.S.A. only) - TEL. +1-708 957 88 09

7711 HIGHWAY 278, SULLIGENT, ALABAMA 35586 (U.S.A.)
TEL. +1-205 698 1231

www.bolzonigroup.com - insidesales.us@bolzonigroup.com

BOLZONI GROUP