Silver Line

The competitive range



KEEP IT SIMPLE

SILVER LINE is a range of reliable and cost-effective clamps suitable for applications in many industries, particularly where lift truck operators require attachments having high performance and low cost.

As complement of the already extensive range of Bolzoni forklift truck attachments, this second range is able to cover the majority of the market requirements.

Suitable for safe, efficient and damage-free handling of all types of loads, this range is designed for heavy duty applications, with a tight budget.









SILVER LINE

Silver Line Clamps

SILVER LINE

Competitive Cost. High Quality. Prompt Delivery. 3 Years Warranty.

Cost effective:

High volume production of dedicated range of capacities and openings resulting in manufacturing savings.
New cost-effective components – such as aluminium profiles, cylinders and wear parts – and optimized manufacturing processes.

36 months warranty:

The SILVER LINE attachments range is included into the new extended 3 years warranty program (36 months guarantee period, or 6000 work hours, whichever comes first).

Short lead time:

Attachments are ready from the shelf, in centralised American stocks.

Robust Design:

Robust frame design for heavy-duty applications.

Ideal for Rental Fleet

and for any rental business. In facts, this range is ideal for short usage attachment needs, in order to optimize the return on investment or to reduce the Total Cost of Ownership.


Technical Features

Long life and long service intervals

- Combination of proven and high tensile aluminium profiles with new wear resistant plastic inserts.
- No wear on aluminium profiles.
- Symmetrical borings in aluminium profiles and symmetrical plastic inserts.
- Higher sliding speed with lower grease requirement.

Simple and quick exchange of wear parts

- Plastic bushings inserted from the side without removing clamp arms.
- Aluminium profiles with commercial hexagonal bolts, no special tools required.










Oil flow rate recommendations


Model	*Minumum GPM*	*Recommended GPM*	*Maximum GPM*
Non-Rotating Clamps	**Oil Flow Rate, Clamp/ Oil Flow Rate, Sideshift**		
LC 16 / 28	4	7	9
LC 32	8	12	16
Rotating Clamps	**Oil Flow Rate, Clamp Oil Flow Rate, Rotator**		
AMX	5	9	11

Oil flow rate recommendations

Model	*Minumum PSI*	*Maximum PSI*	*Minumum PSI*	*Maximum PSI*	*n.*
Non-Rotating Clamps	**Clamping Pressure**		**Sideshifting Pressure**		**Hydr.Func.**
LC 16	650	2,300	1,700	3,200	2
LC 28/32	725	2,300	1,700	3,200	2
Rotating Clamps	**Clamping Pressure**		**Rotating Pressure**		**Hydr. Func.**
AMX	X	2,300	1,400	1,700	2

Bale Clamps - Model LC-G *(Sideshifting)*

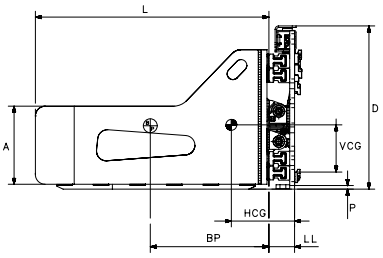

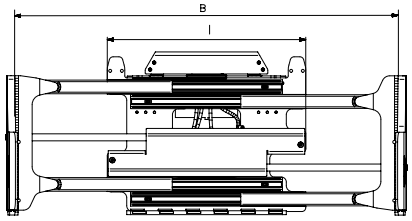

Range: 5,100 - 7,000 Lbs.

- Commonly used for handling pulp bales in the paper industry, as well as for bales of cotton, wool, tobacco, fabrics and other baled materials.
- High tensile aluminium profile.
- Check and pressure adjustment valve.
- Excellent visibility.
- The valve and the cylinder rods are protected in every opening position.
- Reduced weight, effective thickness and center of gravity.

Model	Capacity Lbs. @ 24"	Mounting Class	Frame Width	Opening Range in to in		Arm Dimensions				Minimum Carriage Width	Height	Weight Lbs.	Effective Thickness	Horizontal Center of Gravity	Vertical Center of Gravity	Arms Toe-in	Ground Clearance
	Q		*I*	*B min*	*B max*	*A*	*L*	*E*	*T*	*FL*	*D*	*W*	*LL*	*HCG*	*VCG*	*C*	*P*
LC 28 G6 A/B	5,100	II/III	40.2''	25.1"	77.6"	15.7''	47.2''	1.6''	1.6''	31.1"	32.9"	1,486	5.2''	12.8''	9.5''	0.5''	0.7"
LC 32 G6 B	7,000	III	50.4"	23 .3"	84.0"	17.7''	47.2''	1.6''	1.6''	30.3"	36.5"	2,061	6.6"	10.8"	11.4"	0.4''	0.8"


Notes:


- Two hydraulic functions.
- E= arm thickness, without rib.
- T= arm thickness at the arm base, without rib.
- Pressure gauge.
- Arms welded directly to the guides.
- Check valve.
- Integral sideshift.
- Cylinder protection.
- Valve protection.
- Special arm configurated for handling inside container and railbox (without elbow)
- Wear strips under clamp body and arms.

Options:

- Connection hose kit.
- Class 4 mounting kit option for LC32
- Load Backrest 48"

Pallet Fork Clamps - Model LC-H *(Sideshifting)*

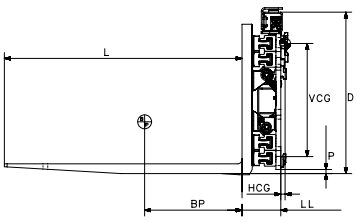

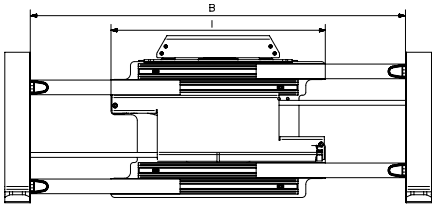

Range: 5,000 Lbs.

- High tensile aluminium profile.
- Reduced weight, effective thickness and center of gravity.
- Excellent visibility.
- Forks welded to the arm carriers.

Model	Capacity Lbs. @ 24"		Mounting Class	Frame Width	Opening Range in to in		Fork Dimensions			Minimum Carriage Width	Height	Weight Lbs.	Effective Thickness	Horizontal Center of Gravity	Vertical Center of Gravity	Ground Clearance
	Q1	*Q2*		*I*	*B min*	*B max*	*L*	*A*	*E*	*FL*	*D*	*W*	*LL*	*HCG*	*VCG*	*P*
LC28H6A/B	5,000	7,000	II/III	43.3"	18.5"	76"	48.0''	5.0''	2.0''	32.1"	32.6"	1.146	7.8"	0.9"	22.8"	0.8"


Notes:

- Two hydraulic functions.
- Q1 = capacity when clamping.
- Q2 = capacity on the forks.
- Check valve.
- Pressure gauge.
- Forks welded to the arm carriers.
- Integral sideshift.
- With valve protection plate.
- With cylinder protection plate.

Options:

- Connection hose kit.

Carton Clamps - Model LC-C *(Sideshifting)*

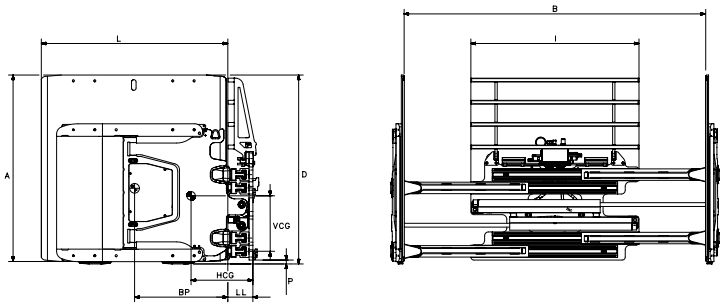

Range: 3,500 Lbs.


- Large surface aluminium pads.
- Single oscillating pad.
- Special high-friction vulcanized rubber lining for increased positive grip allowing safe and damage-free handling.
- Interchangeable left-right, up-down pads for more even rubber wear.
- Thin arm profile and new elbow support design allow easy knifing between loads.
- Robust design for heavy-duty applications.
- High tensile aluminium profiles allowing long life and low lifetime cost.
- Excellent visibility.
- Block valve in the middle for precise arm synchronism.
- Optimized weight, effective thickness and center of gravity

Model	Capacity Lbs. @ 24"	Mounting Class	Opening range	Arm Dimensions			Frame Width	Minimum Carriage Width	Weight Lbs.	Horizontal Center of Gravity	Vertical Center of Gravity	Effective Thickness	Ground Clearance
	Q		*I*	*A*	*L*	*E*	*I*	*FL*	*W*	*HCG*	*VCG*	*LL*	*P*
LC16C6A/B	3,500	II/III	21.0" - 77.6"	48.0"	48.0"	0.8"	43.3"	27.8"	1,697	15.9	14.3"	6.5"	1.0"

Notes:

- Two hydraulic functions.
- Arm thickness at base, including rubber, 3.62"
- Arm thickness, including rubber, 2.2".
- Load backrest.
- Pressure relief valve.
- Flow divider.
- Integral sideshift.

Paper Roll Clamps - Model AMX-F

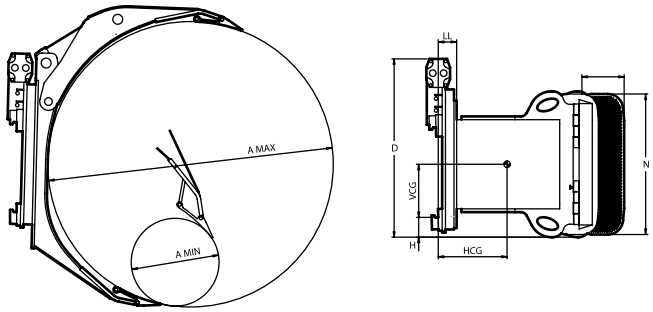

Range: 4,000 Lbs.

- 360-degree rotating paper roll clamp for vertical and horizontal handling of single rolls.
- Pivoting long arm movement.
- Models AMX-F: Fixed short arm.
- Mounting angle 1,5°.

Model	Capacity Lbs. @ 24"	Load Center	Roll Range	Height	Horizontal Center of Gravity	Vertical Center of Gravity	Effective Thickness	Minimum Carriage Width	Contact Pads	Contact Pad Gap	Mounting Height	Mounting Class
	Q	*BP*	*A*	*D*	*HCG*	*VCG*	*LL*	*FL*	*M x N*	*O*	*H*	
AMX-40-1651-F-II	4,000	25.5"	16"-51"	30.7"	10.0"	10.4"	6.3"	29.5"	8.0"-26.8"	-	4.3"	II
AMX-40-1651-F-III	4,000	25.5"	16"-51"	30.7"	10.6"	12.0"	7.5"	29.5"	8.0"-26.8"	-	2.6'	III

Notes:

- Two hydraulic functions.
- Standard contact pads: Cast pad with high-friction surface.

79BA01688US - 02.2025

BOLZONI Inc.
17635 HOFFMAN WAY - HOMEWOOD, ILLINOIS 60430 (U.S.A.)
TEL. +1-800 358 54 38 (U.S.A. only) - TEL. +1-708 957 88 09

7711 HIGHWAY 278, SULLIGENT, ALABAMA 35586 (U.S.A.)
TEL. +1-205 698 1231

www.bolzonigroup.com - insidesales@bolzonigroup.com

BOLZONI GROUP