Fork Positioners

Models FR



The model FR represents the basic Bolzoni fork positioner, used in the most common applications.

The compact structure of the unit, based on a standard Bolzoni sideshift, guarantees extremely reduced weight, effective thickness and centre of gravity.

The compact design of the fork carriers, allowing the use of the standard forks, guarantees the original visibility of the lift truck. The excellent visibility of the unit is furtherly increased by a wide central window in the basic Bolzoni sideshifter, very useful when loading and unloading vehicles.

The fork carriers, actuated by two hydraulic cylinders, slide on a chromed bar in order to ensure fast, smooth and accurate fork positioning.










BOLZONI

Fork Positioners with Fork Carriers

Models FR *(Sideshifting)*

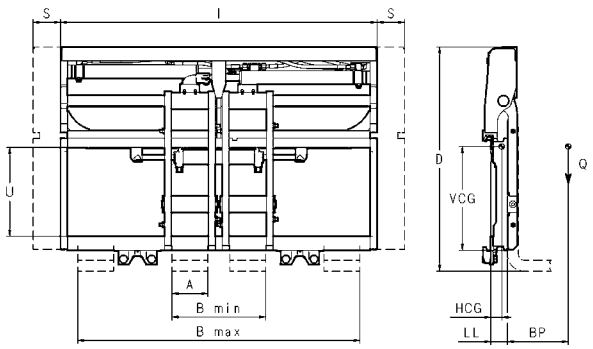

Range: 14,000 Lbs.

Features:

- Separate sideshift.
- With fork carriers.
- Standard forks of the truck can be used without modification.
- Fork carriers sliding on a chromed bar with bushings.
- Excellent visibility, strength and versatility.

Model	Capacity Lbs. @ 24"	Mounting Class	Opening Range out to out		Overall Width	Minimum Carriage Width	Total Sideshift	Height	Fork Support Width	Side Visibility	Weight Lbs.	Effective Thickness	Horizontal Center of Gravity	Vertical Center of Gravity
	Q		*B min*	*B max*	*I*	*FL*	*S*	*D*	*A*	*U*	*W*	*LL*	*HCG*	*VCG*
FR 65 11C	14,000	IV	16.3"	35.4"	42.1"	35.4"	8''	46.8"	5.9"	15.4"	678	5.5"	2.1"	13.9"
FR 65 12C	14,000	IV	16.3"	42.5"	49.2"	35.4"	8''	41.8"	5.9"	15.4"	706	5.5"	2.1"	13.8"
FR 65 13C	14,000	IV	16.3"	46.5"	53.1"	35.4"	8''	41.8"	5.9"	15.4"	784	5.5"	2.0"	13.8"
FR 65 14C	14,000	IV	16.3"	48.2"	55.1"	36.6"	8"	41.8"	5.9"	15.4"	792	5.5"	2.0"	13.8"
FR 65 15C	14,000	IV	16.3"	54.3"	61.0"	39.4"	8''	41.8"	5.9"	15.4"	828	5.5"	2.0"	13.8"
FR 65 18C	14,000	IV	16.3"	65.4"	72.0"	53.1"	8''	41.8"	5.9"	15.4"	916	5.5"	2.0"	13.7"
FR 65 20C	14,000	IV	16.3"	72.0"	78.7"	53.1"	8''	41.8"	5.9"	15.4"	969	5.5"	2.0"	13.7"

Notes:

- Two hydraulic functions required.
- Total sideshift stroke 8".
- Forks are not included in the attachment price.
- Maximum fork length 60".
- Weight and center of gravity are given without forks.
- Delivered without forks. Original lift truck forks can be fitted without any modification.
- Pressure relief valve.

Options:

- Non-sideshifting models.
- Load backrest.

79001297CAN - 1021

BOLZONI CANADA LTD.
211 AVENUE LABROSSE,POINT-CLAIRE - QUEBEC
H9R 1A3 CANADA
Tel. 800-685-7871
www.bolzonigroup.com **sales.ca@bolzonigroup.com**

BOLZONI GROUP